

The Domino A100

First choice for basic coding

Essentials for Reliability

◆ **Reliability Comes As Standard**
Whatever your production cycle demands the Domino A-Series will print dependably, ensuring maximum productivity with minimal operator intervention.

◆ **Consistent Print Quality**
Whether running continuously or shutting down daily, the A-Series printhead technology delivers precise print every time.

◆ **Responds to the Environment**
Intelligent system designs allow the product to perform in a wide range of environments, minimising the effects of temperature and humidity.

◆ **Flexible Installation**
A-Series printers can be installed with only an electrical connection required, eliminating the need for a factory air supply.

◆ **It Cleans Itself?**
Unique ink system design using large internal reservoirs and a nozzle seal allows the A-Series to have truly automatic printhead cleaning giving unrivalled start up and shut down time after time.

◆ **Easy to Use**
One button controls the complete start up and shut down process, eliminating potential operator errors and possible delays associated with manual printhead cleaning. Codes are simple to set up using the full sized keyboard and display. Topic keys provide operators quick access to the most regularly used functions.

◆ **Code Confidentially**
The real time message monitor displays codes as they are printed and can be viewed at any time to make sure that the right code is on the right product at the right time.

General Purpose

Rugged cabinet constructed in 304 grade stainless steel is suitable for use in a wide range of general manufacturing environments. The easy to wipe clean IP53 cabinet is splash and dust proof.

Simple to Use

Easy to operate, easy to read backlit display with big button keyboard provides access to intuitive control and data entry software. Most commonly used functions are made accessible using topic keys.

Add Fluids in Seconds

Colour coding and sealed container design make sure that the right fluids are fitted without spills.

Flexible Applications

The A100 can print up to 2 lines with a variety of print formats which include logos, automatic serial numbering/batch coding and real time clocks.



Reliable Start Ups

Domino provides the only sealed nozzle technology on the market ensuring clean dependable start up even after extended periods of shutdown.



Flexible and Reliable Installations

Optimum reliability is achieved through the use of surface mount technology and PCMCIA cards for fast configuration and programming.




DOMINO A-SERIES
A100
abcdefg 1234567



Electrical components of many types can be coded



High quality coding can mark products without spoiling their consumer appeal



Continuous marking at high or low duty cycles





Automotive products come in all shapes and sizes but can all be successfully coded with Domino ink jet printers



The Domino A100



Dimensions

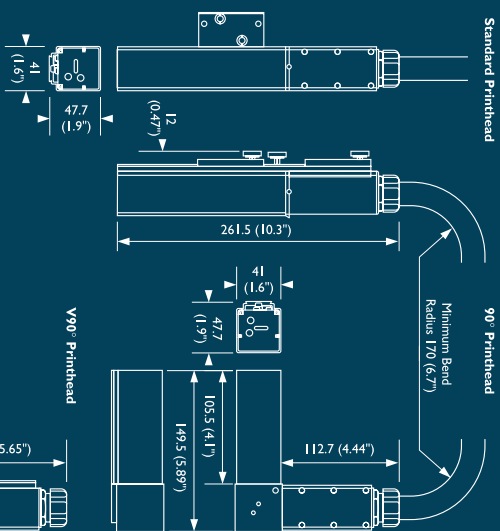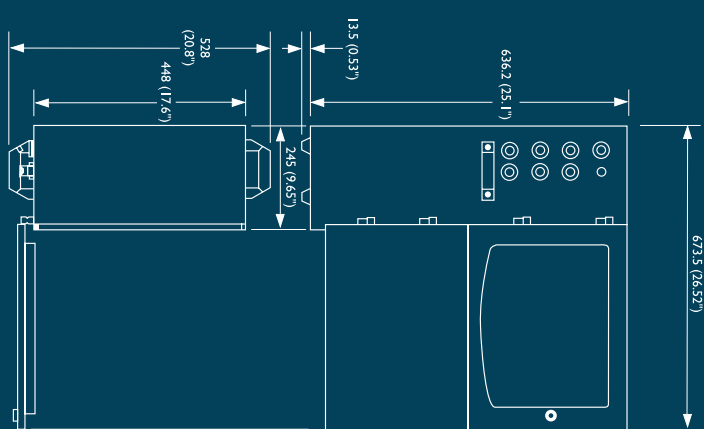

Control Unit

Control Panel: Membrane touch button
Cabinet: Stainless Steel (304) designed to IP53. (BS EN 60529:1992)
Cabinet dimensions: 245mm x 450mm x 650mm
(9.6" x 17.7" x 25.6")
Weight: 33kg (73lbs)

Character Control

- ◆ Auto repeat
- ◆ Auto invert/reverse
- ◆ User defined clock format
- ◆ Sequential/batch numbering
- ◆ Inverse reverse and bold characters
- ◆ Character width and height adjustment
- ◆ Print delay
- ◆ Product counter
- ◆ Message repeat

Data Input Options

Serial RS232
Serial RS485
Rate: 110-38.4k Baud, software configurable

Ink System

Viscosity control: Automatic
Ink bleed control: Automatic on start up
Ink and make-up refill: 825ml (87qt) cartridge automatically metered
Peltier: Optional

Printhead

Dimensions: 240mm x 41mm x 47mm
(9.45" x 1.61" x 1.85")
Conduit length: 3m (11.8)
Positive air: Optional internal supply

Environment

Temperature range: 5 - 45°C (40 - 112°F) operating
Humidity: 10 - 90% (non-condensing)
Electrical requirements: Single phase, fully auto-ranging
90 - 132V/180 - 264V, 50/60Hz 200VA

Standard Connections

Product detector: 12V 100mA for photocell or proximity detector; IP68 6 way socket
Shaft encoder input: Open collector or TTL encoder 12V via IP68 6 way socket

Options

Alarm beacon connector: IP68 7 way socket
Auxiliary alarms connector: IP68 9 way plug
User port connector: IP68 25 way socket

Accessories

Full range of photocells, stands and brackery



Domino UK Ltd
Bar Hill
Cambridge CB3 8TU
Tel: +44 (0)1954 782551
Fax: +44 (0)1954 782874
Web: www.domino-printing.com

Domino Anjet Inc.
1290 Lakeside Drive
Gurnee, Illinois 60031
Tel: +1 800-323-4754
Fax: +1 847-244-2645
Web: www.dominoanjet.com



UK Cert No. FM 13758
BS EN ISO 9001



USA Cert No. FM 23343
BS EN ISO 9002

